


# RT1

## DUAL TELESCOPIC RAMP



	32824x12/24
A Hole structure	1120 mm
B Total lenght zone of fixed	761 mm
C Total height of ramp	78 mm
D Total width of mobile platform	963 mm
E Useful width of mobile platform	814 mm
F Useful lenght of mobile platform	1050 mm
I Total width of fixed platform	1242 mm
J Total length of fixed platform	787 mm

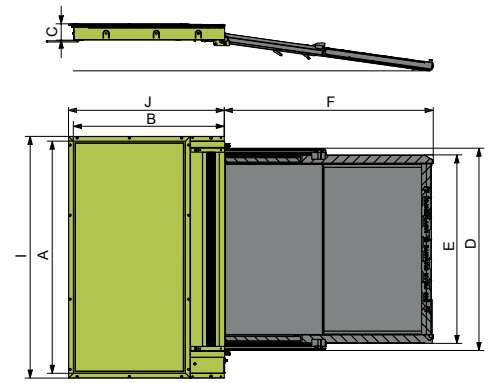

### DESCRIPTION

- Electric or manual mode.
- Powered 12v / 24v
- Total weight: 75,5 Kg
- Maximum load 300 Kg
- Compact ramp 1242 x 787 x 78 mm
- Unfolded platform of 1150 mm
- Easy maintenance.
- Vehicles intended for Class I, II, A.
- According to regulations UN R107

### ADVANTAGES

- Access to the mechanism from inside of the bus.
- Good adaptation with the floor of the vehicle.
- Dirt resistant.
- No step when entering.

