



SAFE-T-PUNCH™

PRODUCT DATA SHEET

STP50P


August 2023 Rev 8



Low profile 50mm diameter Single Glazing Device for 3mm to 12 mm Toughened Glass

Components: -

Body: -	Precision injection moulded ABS
Impact tip: -	Carbide hard material
Adhesive: -	3M 4936F VHB Tape
Device Weight: -	21 g
Sticker Weight: -	12 g
Operating Instructions: -	IDDS (black-backed) Photoluminescent Grade C Self-adhesive

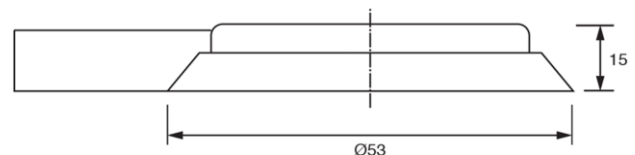

Performance data:-

Operating means: -	By Hand.
Operating force required: -	3 Joules.
Temperature range: -	-40 to +80 Degrees Celcius



Critical requirements:

Installation: -	Install Safe-T-Punch™ on clearly marked readily breakable toughened safety glass only.
Suitability: -	NOT suitable for use on laminate glass (Front windscreen of vehicles).
Installation method: -	Clean, Peel and Stick in accordance with our surface prep and installation instructions.

Compliances: -

Conforming to regulations: -	UN ECE R107 Emergency Windows technical requirements. See our PLR Distribution declaration of conformity for the full list of compliances
------------------------------	--

Quality: -

Safe-T-Punch™ is proudly produced in South Africa under TUV Certified ISO9001:2015 DAkkS Accredited quality management system.



Globally distributed by PLR Distribution (Pty) Ltd
www.Safe-T-Punch.co.za
Enquiries@Safe-T-Punch.co.za