



SAFE-T-PUNCH™

PRODUCT DATA SHEET

STP40N


JULY 2024 Rev 5



40mm Diameter Standard Single Glazing Device for 3mm to 12mm Toughened Glass

Components: -

Body: -	Black anodised aluminium
Plunger: -	Red anodised aluminium
Safety tag: -	Breakaway plastic
Impact tip: -	Carbide hard material
Adhesive: -	3M 4936 VHB Tape
Device Weight: -	64 g
Sticker Weight: -	12 g
Operating Instructions: -	IDSS (black-backed) Photoluminescent Grade C Self-adhesive vinyl 136mm x 80mm

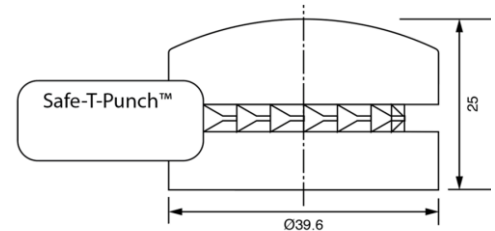

Performance data:-

Operating means: -	By Hand.
Operating force required: -	3 Joules.
Temperature range:-	-20°C to 90°C

Critical requirements: -

Installation: -	Install SAFE-T-PUNCH™ on clearly marked readily breakable toughened safety glass only.
Suitability: -	NOT suitable for use on laminate glass (Front windscreen of vehicles).
Installation method: -	Clean, Peel and Stick.

Compliances: -

Conforming to regulations: -	UN ECE R107 Emergency Windows technical requirements. FMVSS 217 Window retention and release. International Maritime Organisation Regulation 13.
------------------------------	--

Quality: -

SAFE-T-PUNCH™ is proudly produced in South Africa under TUV Certified ISO9001:2015 DAKS Accredited quality management system.



Globally distributed by PLR Distribution (Pty) Ltd
www.Safe-T-Punch.co.za
Enquiries@Safe-T-Punch.co.za