


AKASYSTEM

15 AKM 46 POC

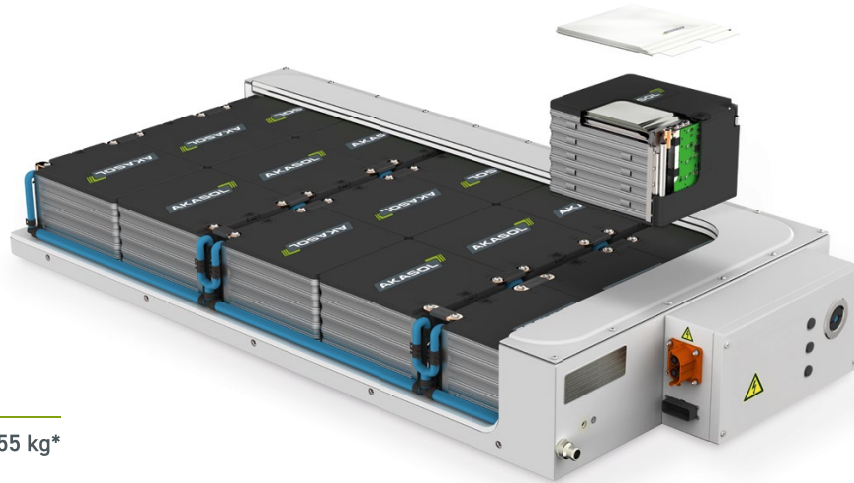

278 kW • 30.6 kWh • 666 V • 355 kg*

Typical product configuration.
Appearance and interfaces may vary.

*All technical data depending on HV Fuse, connector, DoD/SOC and cooling.

CERTIFIED ACCORDING TO RAILWAY AND AUTOMOTIVE STANDARDS.

- > Development according to ISO 26262 up to ASIL C / EN 61508 SIL 2 possible
- > Tested safety (USABC, IEC, SAE, EN 50657, EN 50129, UN 38.3) and "real world" experience
- > Multi-level short circuit protection on system level
- > Additional operating safety due to redundant battery management system
- > Suitable for multi-string systems with monitoring on single-string and full system level
- > Protection classes IP67 to IP6K9K possible
- > Robust and proven control unit BMS master (SIL2 compatible hardware)
- > SOC / SOH analysis
- > Single cell voltage monitoring and balancing

SCALABLE. VALIDATED. DURABLE.


- > High energy and performance density
- > Easy system connectivity / ready-to-install (aligned connection points, standardized CAN bus, optional VDA / SAE cooling connections)
- > Excellent price-performance ratio as a result of the development for serial production
- > Liquid cooling for even temperature distribution
- > Compact and lightweight solution, significant volume reduction due to liquid cooling
- > Long service life due to active and passive thermal management
- > Exceptionally robust, stainless steel battery case
- > Serial production, ISO 9001 compliant
- > Passive cell balancing
- > Maintenance-free operation

ELECTRICAL DATA	AKASYSTEM 15 AKM 46 POC
Cell connection in module	12s1p
Capacity	46 Ah
Energy	30,6 kWh
Technology	Li-Ion NANO NMC
Nominal voltage	666 V
Voltage (max.)	756 V
Voltage (min.)	486 V
Discharging power max. (10s) ^A	278 kW
Charging power max. (10s) ^A	153 kW
Continuous power (RMS)	77 kW
Power consumption in standby mode	7.5 W
Cycle life (at 80% DoD, 25 °C)	> 7,000 cycles

^A Peak rating depending on fuse and cable / connector configuration / SOC and temperature

MECHANICAL DATA	AKASYSTEM 15 AKM 46 NANO NMC
Coolant pressure (max.)	1.0 bar
Coolant pressure loss at nominal throughput and T _{coolant} = 25 °C (water/glycol=50/50) @ throughput quantity	370 mbar @ 1,000 l/h
Operating temperature range during discharging	-15 to 55 °C
Operating temperature range during charging	0 to 45 °C
Protection classes	IP67 (IP6K9K possible)
Weight (incl. contactor box) (min)	355 kg
Dimension (L x W x H) in mm	1,568 x 750 x 216

AKASYSTEM – SAFETY CONCEPT

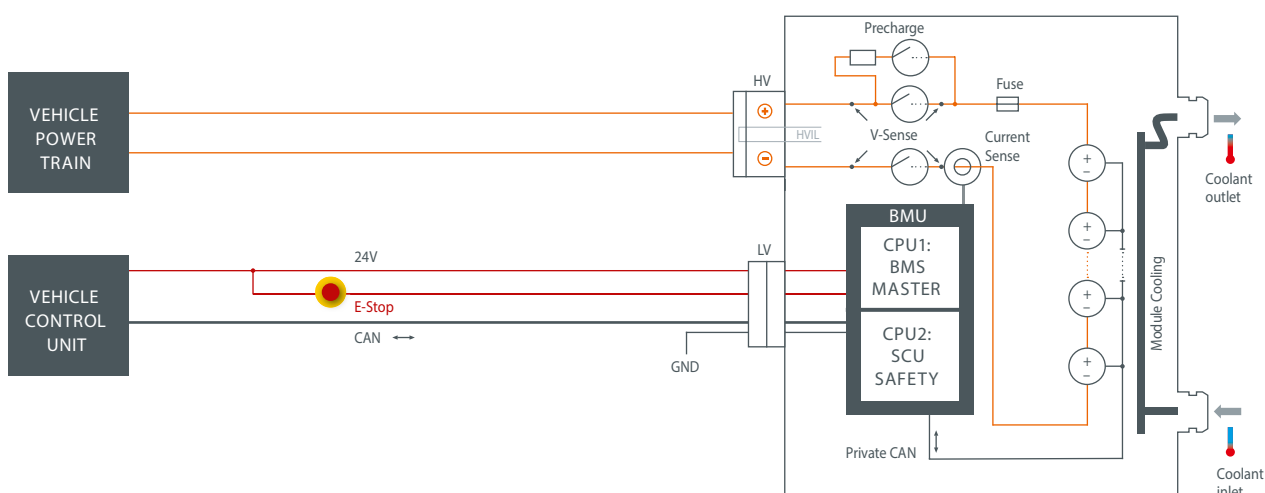

AKASOL AG
NEW HEADQUARTERS & GIGAFACTORY 1

Kleyerstrasse 20
64295 Darmstadt | Germany
Tel.: +49 6151 800500 | info@akasol.com
www.akasol.com

HIGH-PERFORMANCE BATTERY SYSTEMS.
MADE IN GERMANY WITH 30 YEARS OF EXPERIENCE.

AKASOL is a leading German developer and manufacturer of high-performance and high-energy lithium-ion battery systems for e-mobility applications as well as turnkey solutions. With more than 30 years of experience AKASOL provides the technically most mature and foremost technologies for traction battery systems in buses, commercial vehicles, rail and industrial vehicles, as well as in ships and boats – from prototype to serial production.

Configuration and images exemplary. Values depend on SOC, SOH and temperature. Subject to amendment when technical changes and/or innovations are made. No liability for printing errors. Version: July 2021